



### THREE PHASE ISOLATION TRANSFORMER

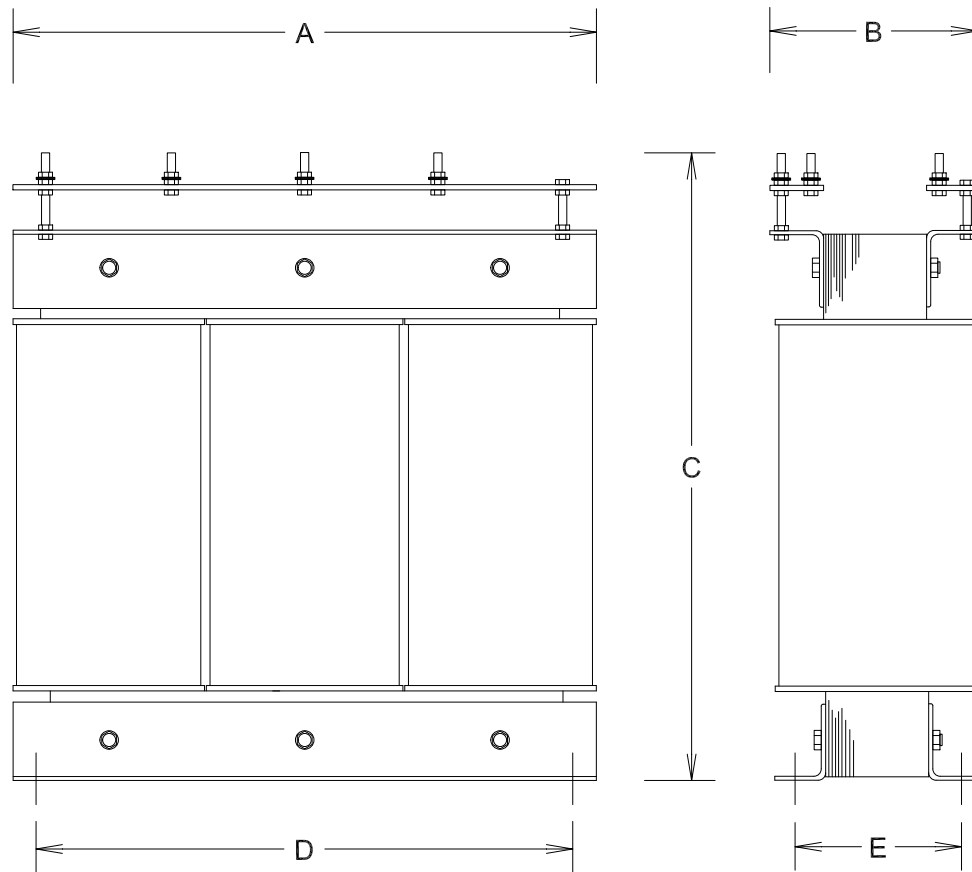

kVA	A	B	C	D	E	kg
0.50	180	95	180	120	60	6
0.75	180	105	180	120	80	9
1.00	240	120	240	170	90	14
1.50	240	140	240	170	100	21
2.00	300	140	300	220	100	28
2.50	300	150	300	220	110	33
3.00	300	160	300	220	120	40
4.00	300	170	300	220	130	44
5.00	360	200	360	320	100	50
6.30	360	210	360	320	110	65
8.00	360	220	360	320	130	75
10.00	420	240	420	380	130	80
12.50	420	240	420	380	130	90
16.00	420	260	420	380	150	100
20.00	480	300	500	440	180	120
25.00	480	315	500	440	195	135
31.50	480	330	500	440	210	150
40.00	480	350	500	440	230	165
50.00	600	320	600	540	200	220
63.00	600	340	600	540	220	280
80.00	600	360	600	540	240	350
100.00	720	380	720			495
125.00	840	400	840			555
160.00	840	440	840			720

ALL DIMENSIONS IN mm

REV.	DATE	DESCRIPTION	BY	CHK	APP	VENDOR NAME		TITLE			
00	23/01/09	ISSUED FOR REVIEW	PB	MB	MB	BOARDMAN TRANSFORMERS LTD		THREE PHASE ISOLATION TRANSFORMER Terminal block, stud or bus bar connection Manufactured to comply with the requirements of BS171 IEC60076			
PROJECT NAME						VENDOR NO.		0.50 - 160 kVA			
CLIENT NAME						DRAWING NO.		SIZE	CAGE CODE	DWG NO	REV
						PROJECT NO.		A4			00
								SCALE	N.T.S		SHEET
						1	1	00			